

ORDER FORM

A4 (210x297)

LMT [(0,0) (196,286)]

.DWG

FILE = 4405

REV. 00 DTD 05/12/17

La CEDASPE Power S.r.l. si riserva a termini di legge la proprietà del presente disegno con divieto di riproduzione o comunicato a terzi senza sua autorizzazione.

Size:

25

50

80

Model:

EB24
(Threaded 1" G)

EB50
(Round flange
4 holes)

EB79
(Round flange
4 holes)

EB25
(Round flange
4 holes)

EB80
(Round flange
8 holes)

BQ80
(Square flange
4 holes)

Wiring Diagram:

MA

ML

MG

S4
(Only for 2"/3")

SPECIAL

Oil Flow Rate:

65 Cm/s

100 Cm/s

150 Cm/s

200 Cm/s

Operating conditions:

Normal Ambient
(-40°C)

Very Low Temp.
(-60°C)

Very Corrosive
(-40°C)

Desert/Tropical
(-40°C)

Screws: Inox A2
Window: PMMA
Finish: Painted 80µm
Gasket: HNBR

Screws: Inox A2
Window: Temp.Glass
Finish: Painted 80µm
Gasket: Blue Fluorosil.

Screws: Inox A4
Window: Temp.Glass
Finish: Painted 160µm
Gasket: HNBR

Screws: Inox A2
Window: Temp.Glass
Finish: Painted 80µm
Gasket: HNBR

Colour:

RAL7030

RAL7032

RAL7033

RAL7035

RAL7036

RAL7038

RAL7040

RAL7044

RAL9002

ANSI70

Equipment:

Standard

With
Plug & Socket

With
Sun Shield


With 1/4" G
drain Cock

With 1/8" G
Cock

SPECIAL

Notes:

.....
.....
.....
.....

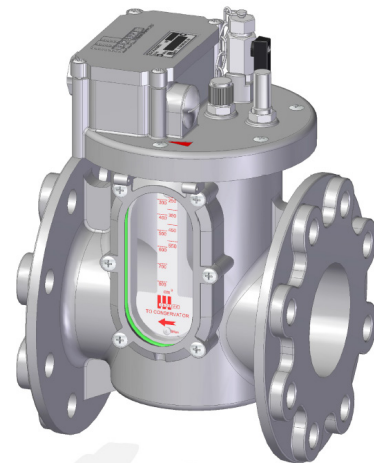

Titolo
Buchholz relay EB
Order sheet

Data 05/12/17
Scala ==
Dis.
Visto

Dis. Nr
4405